



# Rail Strap example -For more information visit - [www.oneslotfencing.com](http://www.oneslotfencing.com)

Screw the strap to the end of the rail  
The strap can be rotated if required  
We recommend number 8 (4mm diameter shank)  
screws at least 50mm long

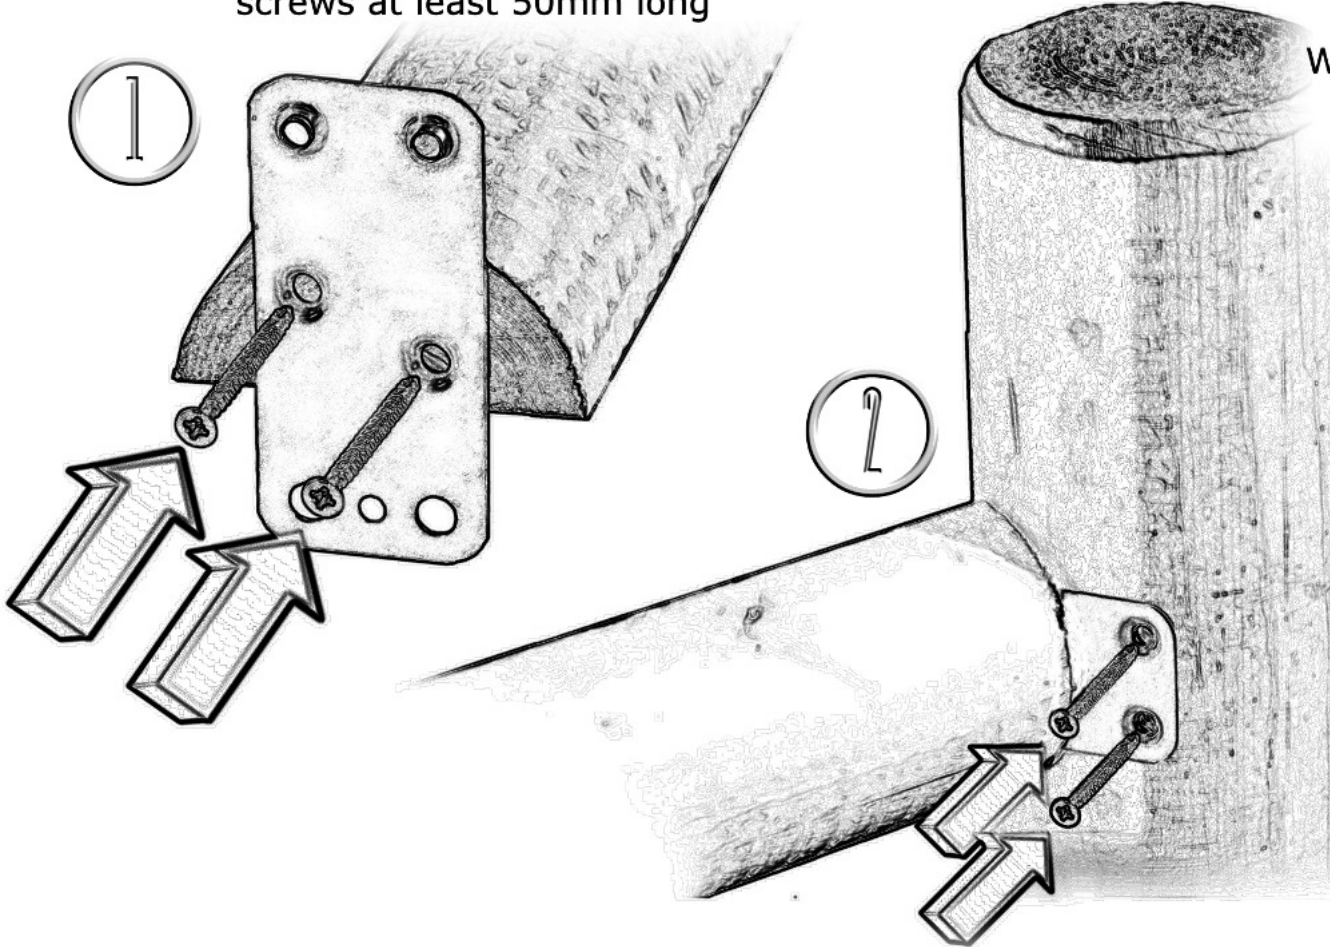

Bend strap to suit post (If necessary)  
Fix the central hole  
We recommend number 8 (4mm diameter shank)  
countersunk screws 40mm long

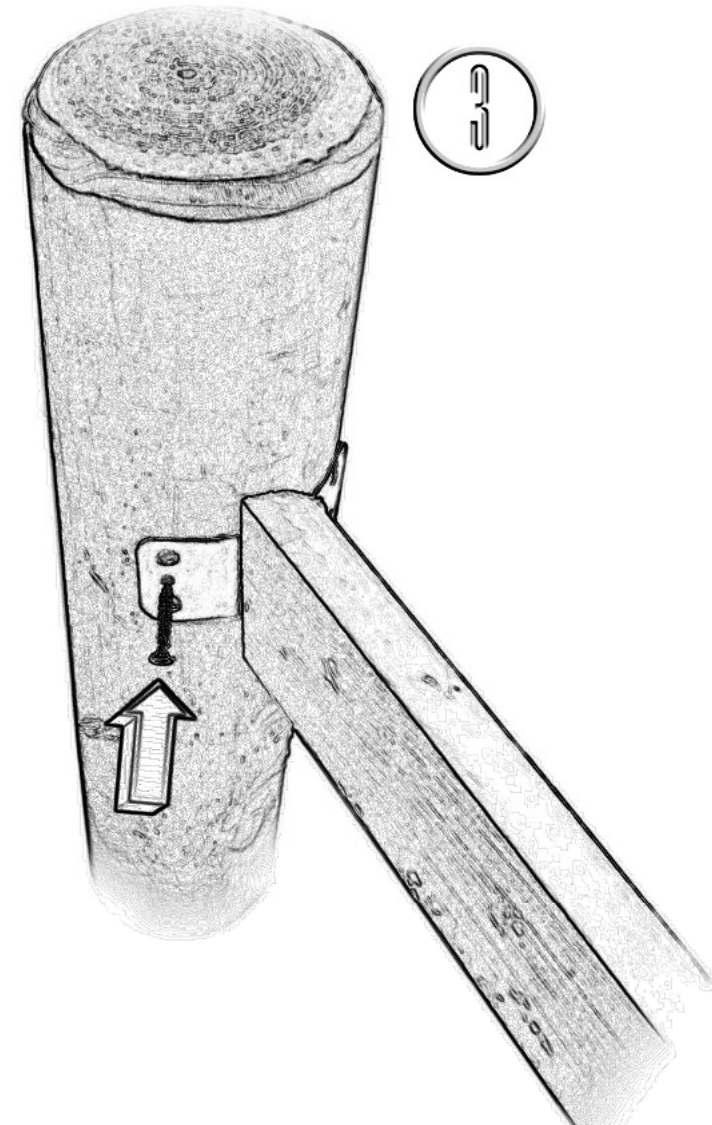

Bend strap to suit post (If necessary)  
Fix the two Xtrude holes  
We recommend number 8 (4mm diameter shank)  
countersunk screws 40mm long



Keep out of reach of children

Handle & install with care: Sheet metal parts may have sharp edges  
Wash hands after handling: Parts have a mineral oil protective coating